


PRODUCT DATA SHEET

BLIST

Model Fireplace for wood «**B Max E 3.0 BX**»
 Manufacturer Blist doo
 Kralja Aleksandra Obrenovića 13
 14104 Beloševac, Valjevo






Exploded view and spare parts

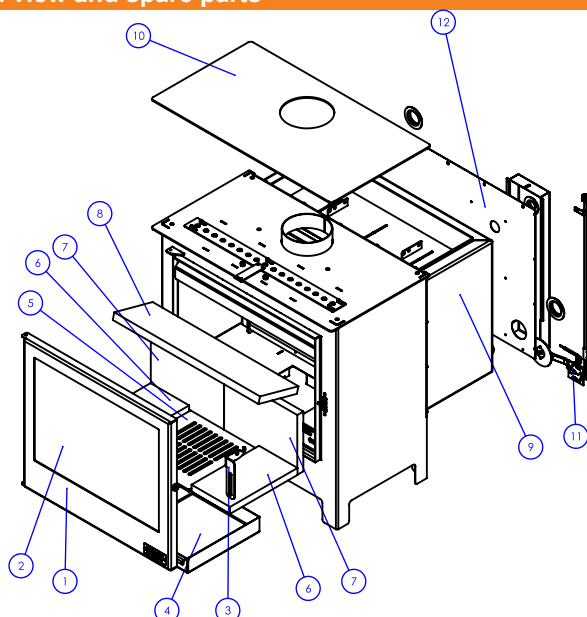

ITEM	NAME	DIMENSION (mm)	QUANTITY
1	Door	30x533x608	1
2	Ceramic glass	4x395x540	1
3	Steel handle	4x74x135	1
4	Ashtray	55x245x300	1
5	Cast iron grate	8x280x	1
6	Vermiculite	25x160x280	2
7	Vermiculite	25x215x304	2
8	Vermiculite	25x165x605	1
9	Boiler	488x363x698	1
10	Top plate	4x415x750	1
11	Automatic controller	/	1
12	Back plate	30x455x614	1

Dimensions and air regulation

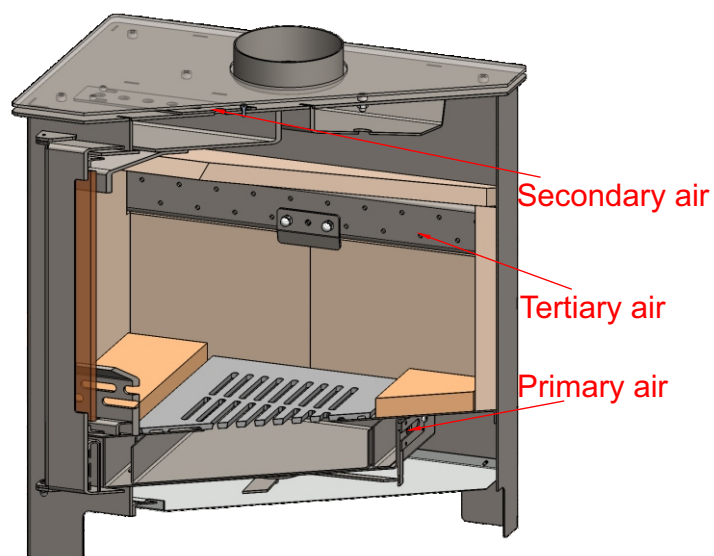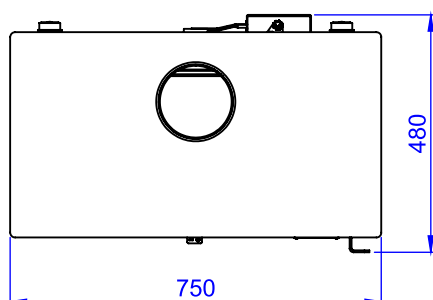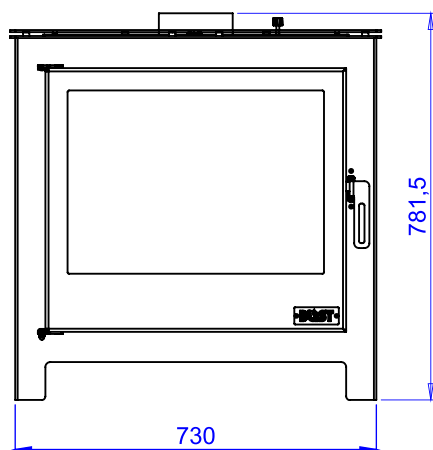


PRODUCT DATA SHEET



Dimensions and weight

Height [mm]	1015
Width [mm]	750
Depth [mm]	480
Combustion chamber width [mm]	610
Combustion chamber height [mm]	360
Combustion chamber depth [mm]	310
Flue pipe outlet position, diameter [mm]	top, 150
Net weight [kg]	137
Mass of the test fuel fired hourly [kg/h]	3,82
dR Distance rear [cm]	10
ds1 Distance left [cm]	20
ds2 Distance right [cm]	20
dp Distance front [cm]	110
dL Front side radiation zones [cm]	48
dB Distance bottom (excluding the footing) [cm]	0
dF Distance bottom [cm]	40
dc Distance top [cm]	>75

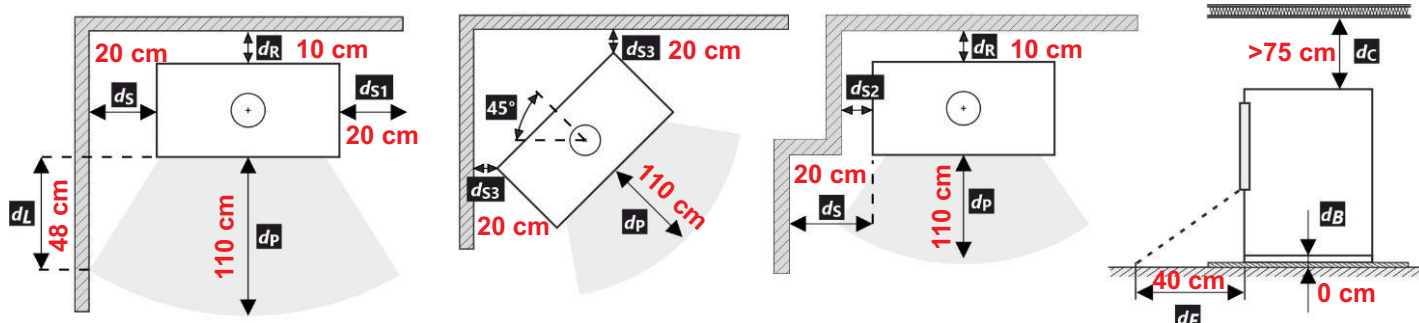

Output

Nominal heat output [kW]	12.8
Maximal heat output [kW]	19.0
Part load heat output [kW]	/
Efficiency [%]	78.7
Seasonal efficiency [%]	68.7
Energy efficiency class	A

Function

Primary air	Yes, with regulation
Secondary air	Yes, with regulation
Tertiary air	Yes
Ash removal	Ash pan

Data for the chimney sweep

Exhaust gas mass flow [g/s]	16.6
Flue gas temperature [°C]	257
Necessary flue draught [Pa]	12±2

Meets standards

EN 16510-2-1:2022	
Eco design	
BImSchv stufe 2	
4 Stelle (Italian)	